



# DOUBLE SWIVEL SOCKET

## CORNER SUPPORT

### BASIC INFO

**Number of Connections:**

Three

**Number of Set Screws:**

Three

**Finishes Available:**

Galvanized


**Piece Allow Movement:**

Yes

Double Swivel Sockets are unique in that this fitting lets you adjust two pipes to a custom angle with a central running pipe. The central pipe runs through the central fitting point and the two end pipe fittings have swivel connections to let you adjust the angle of the pipe. Each connection point on the fitting comes with a screw.

### FEATURES:

- Hot-dipped galvanized coating for corrosion resistance
- Iron construction for durable performance
- Easy installation and removal, no permanent connections
- No special tools needed
- Use an Allen Wrench for connections
- Able to operate in temperatures ranging from -20°C to 300°C

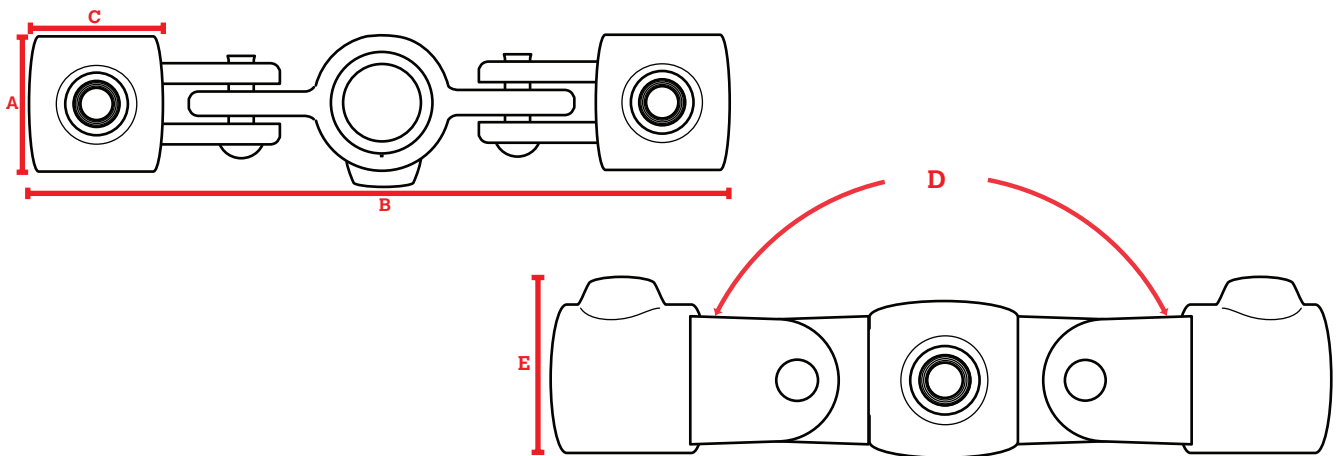

Part #	Finish	Sizing	Set Screw (in x mm)	A (Total Height)	B (Total Width)	C (Insertion Depth)	D (Angle)	E (Depth)	Fits Pipe OD (in)	Weight (lbs)
676-704HC	Galvanized	3/4in	1/4 x 12.5	1.46	7.96	1.18	180°	1.67	1.050	1.47
676-706HC	Galvanized	1-1/4in	3/8 x 12.7	2.17	9.17	1.50	160°	2.33	1.660	2.88